

### FEATURES



- Low natural frequency.
- Frame material for SUS304 & Aluminum alloy.
- Spring rust resistance test by ASTM-B117&CNS8886 salt spray test.

### BENEFITS

- Quick and easy installation.
- Horizontal stability is high.

### APPLICATIONS

- Electronic equipment.
- Small precision equipment.

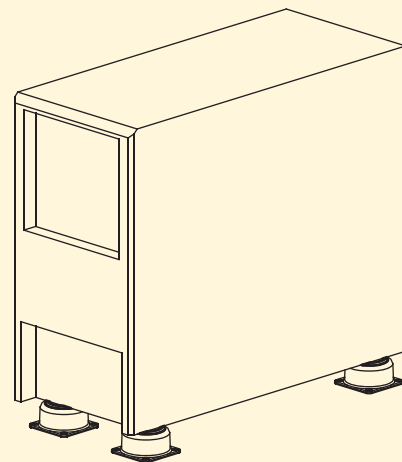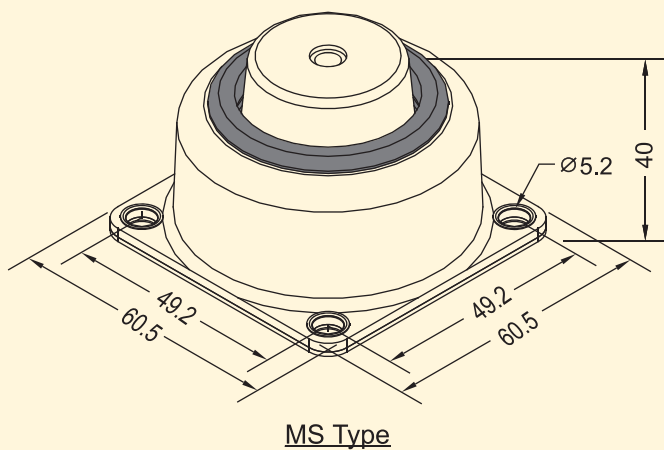

### Specification

Part Number	Rated Capacity Kg	Spring Rate Kg/mm	Rated Defl. mm	Color Code	Part Number	Rated Capacity Kg	Spring Rate Kg/mm	Rated Defl. mm	Color Code
MS-005	4.5 ~ 8.0	0.4	25	Yellow	MS-015	11.0 ~ 18.0	1.0	25	Dark Green
MS-010	8.0 ~ 11.0	0.6	25	Blue	MS-025	18.0 ~ 28.0	1.5	25	Brown