



For Blower and Fans

BK-B ISOLATOR

Spring Mounts

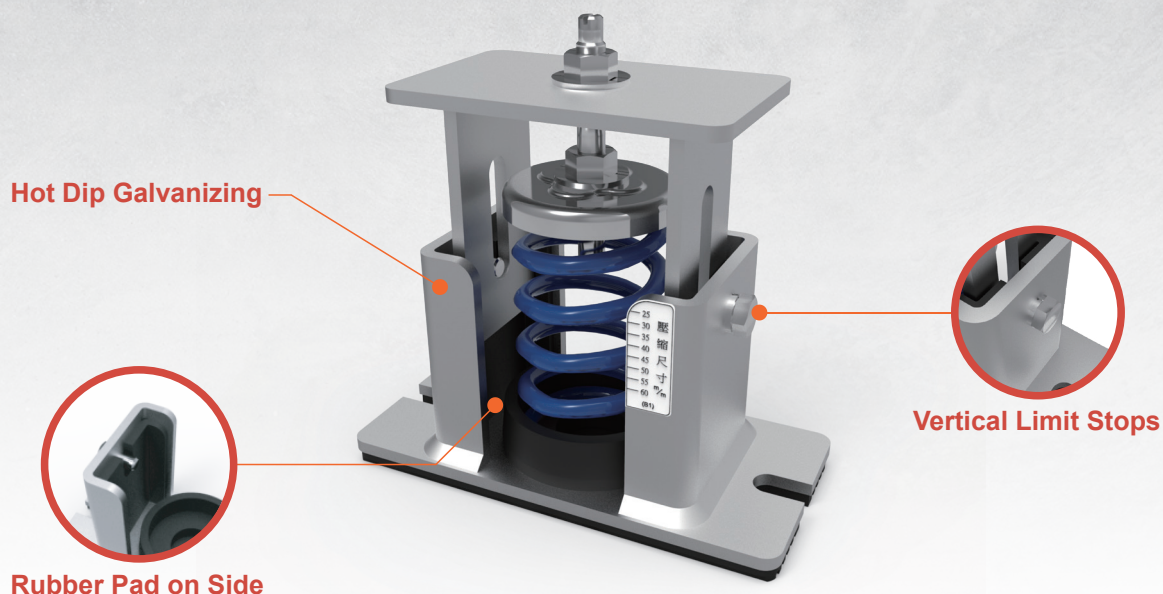

Vertical Limit Stops



- **VERTICAL LIMIT STOPS**
Out of contact during normal operation.
- **RUBBER PAD ON SIDE**
Side Rubber Pad will provide the stability when turn on the equipment.


Coil Spring

◎Efficiency


Frequency (rpm)	Deflection 40mm	Deflection 25mm
1750	99.3 %	98.8 %
500	90.2 %	83.3 %
300	67.0 %	34.1 %

Hot Dip Galvanizing

◎Lifecycle

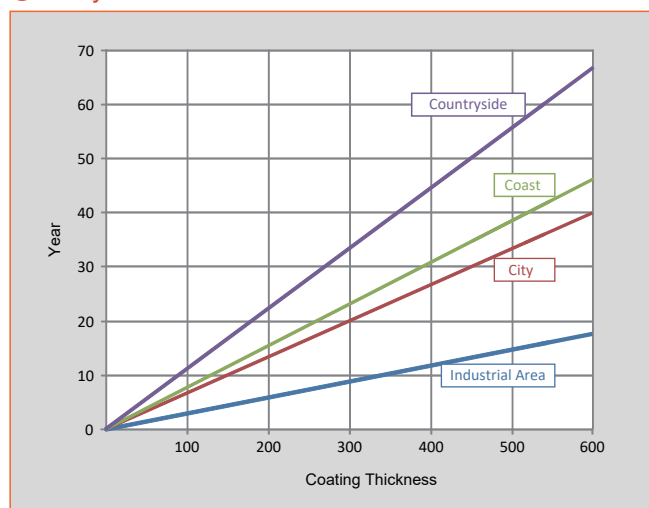

◎Transmissibility

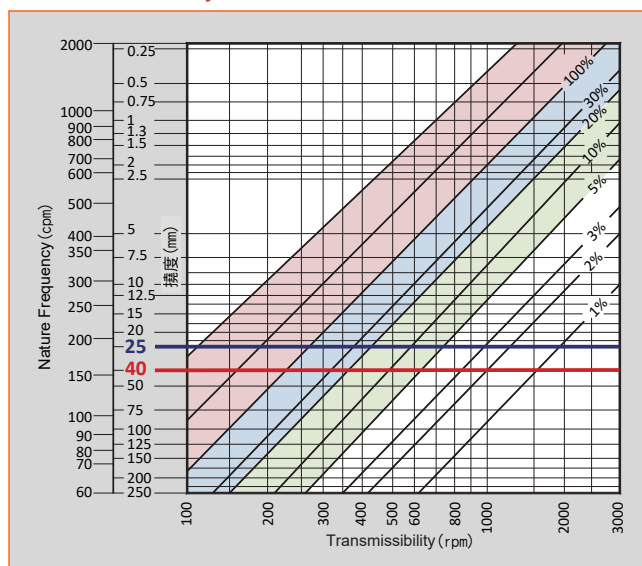


Features

1. Frame with hot dip galvanizing, and coil spring with powder coating finish
2. Resilient housing guides to prevent metal-to-metal contact
3. Non-skid rubber pad
4. Quick and easy installation
5. Heavy-duty vibration isolation




Specification

◎BK-B Type

Type		Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
BKS-B	BKS-020-B	10~20	0.8	Yellow
	BKS-030-B	20~30	1.2	Dark Green
	BKS-050-B	30~50	2	Red
	BKS-070-B	50~70	2.8	Blue
	BKS-090-B	70~90	3.6	Brown
	BKS-120-B	90~120	4.8	Gray
	BKS-150-B	120~150	6	White
	BKS-180-B	150~180	7.2	Orange
	BKS-250-B	180~250	10	Green
BKM-B	BKM-100-B	50~100	4	Yellow
	BKM-150-B	100~150	6	White
	BKM-200-B	150~200	8	Dark Green
	BKM-250-B	200~250	10	Red
	BKM-300-B	250~300	12	Blue
	BKM-400-B	300~400	16	Brown
	BKM-500-B	400~500	20	Red
	BKM-600-B	500~600	24	Gray
	BKM-700-B	600~700	28	Yellow
	BKM-850-B	700~850	34	Khaki
	BKM-1000-B	850~1000	40	Dark Green
BKN-B	BKN-150-B	75~150	3.8	Blue
	BKN-200-B	150~200	5.0	Brown
	BKN-350-B	200~350	8.8	Gray
	BKN-450-B	350~450	11.3	Red
	BKN-550-B	450~550	13.8	White
	BKN-650-B	550~650	16.3	Green
	BKN-850-B	650~850	21.3	Dark Green
	BKN-1000-B	850~1000	25.0	Yellow

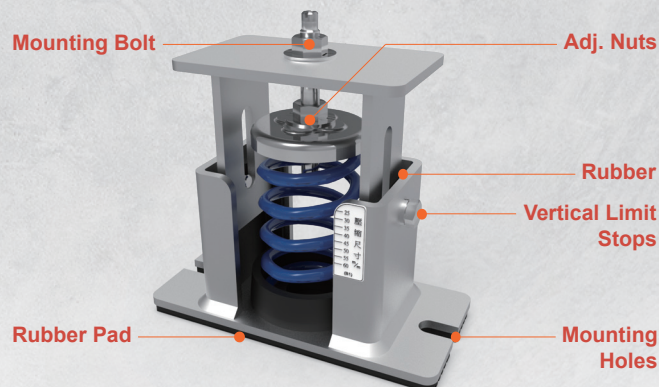

Dimensions(mm)

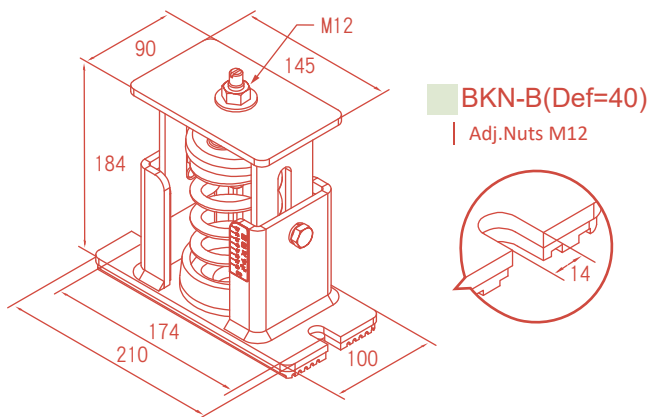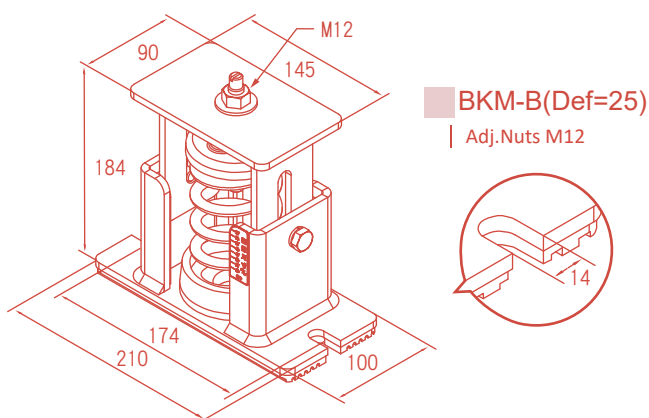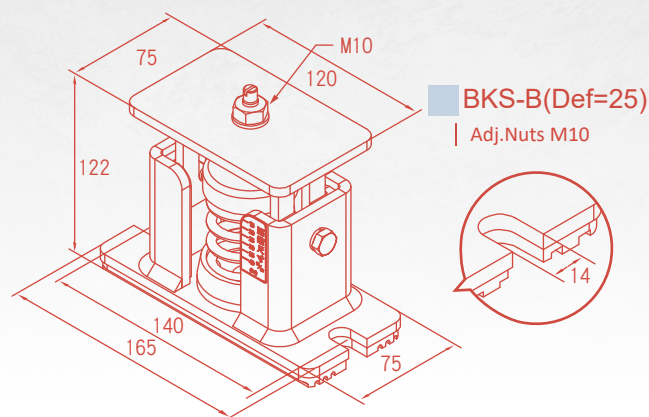

※PATENT NO.M532523

本公司保有依實際需要，變更本目錄內容之權利。