



JH Hanger ISOLATOR




Comparison Chart

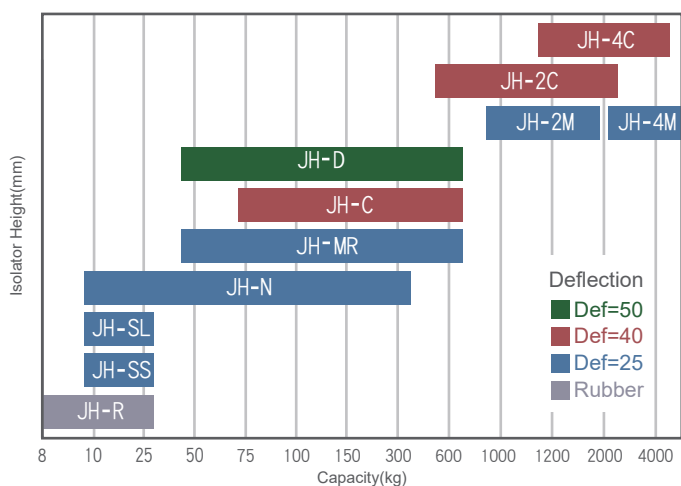

Function



Rod can Swing 30° before contacting resilient bushing




Reinforced

Coil Spring

◎Efficiency

Frequency (rpm)	Deflection 25mm	Deflection 40mm	Deflection 50mm
1750	98.8 %	99.3 %	99.4 %
500	83.3 %	90.2 %	92.3 %
300	34.1 %	67.0 %	75.2 %

◎Transmissibility

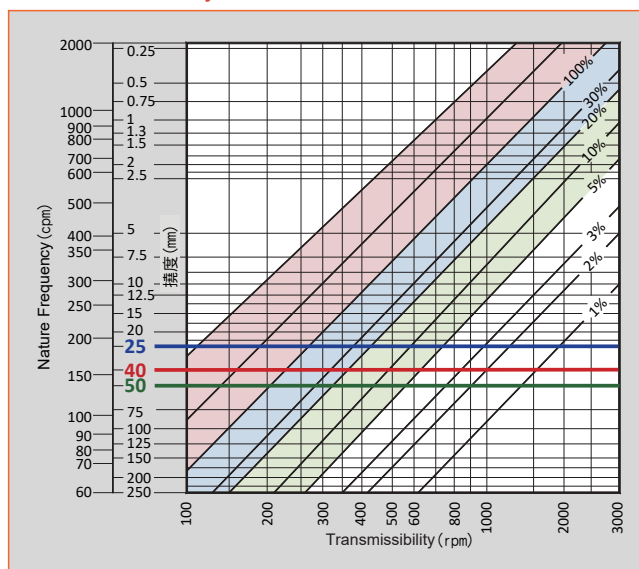


Features

1. Neoprene spring cup with a projecting bushing to prevent steel-to-steel contact
2. Neoprene bushing for upper mounting rod
3. With deflection scale
4. Fail safe design




Dimensions(mm)

NEW

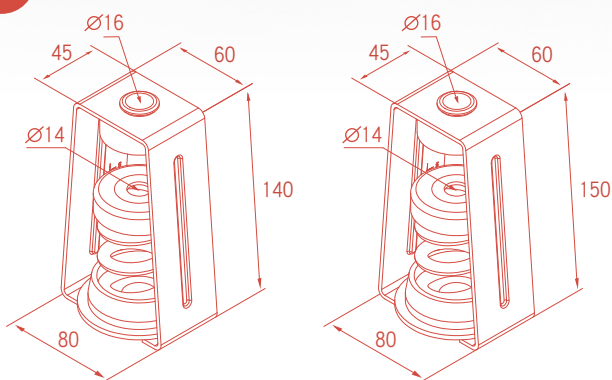

JH-020-N ~ JH-150-N ● JH-180-N ~ JH-300-N

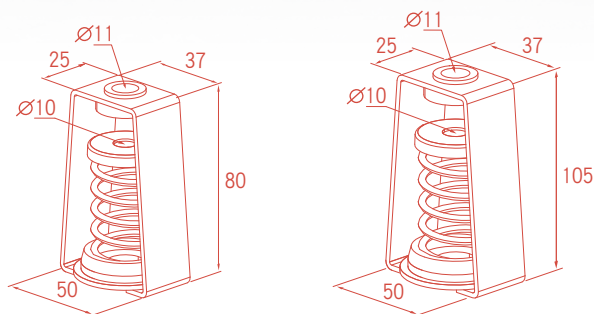

JH-SS

JH-SL

Specification

◎JH-N(Deflection=25mm)

Type	Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
JH-020-N	10~20	0.8	Yellow
JH-030-N	20~30	1.2	Dark Green
JH-050-N	30~50	2.0	Red
JH-070-N	50~70	2.8	Blue
JH-090-N	70~90	3.6	Brown
JH-120-N	90~120	4.8	Gray
JH-150-N	120~150	6.0	White
● JH-180-N	150~180	7.2	Orange
● JH-250-N	180~250	10	Green
● JH-300-N	250~300	12	purple

● Isolator Height = 150mm ◦


◎JH-SS(Deflection=25mm)

Type	Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
JH-015-SS	10~15	0.6	Blue
JH-025-SS	15~25	1.0	Dark Green


◎JH-SL(Deflection=25mm)

Type	Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
JH-015-SL	10~15	0.6	Blue
JH-025-SL	15~25	1.0	Dark Green


Dimensions(mm)

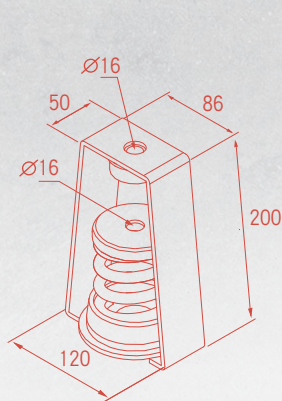

JH-MR

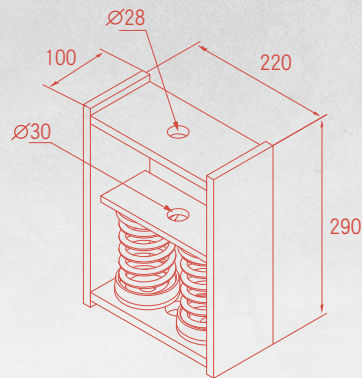

JH-2M / JH-2C

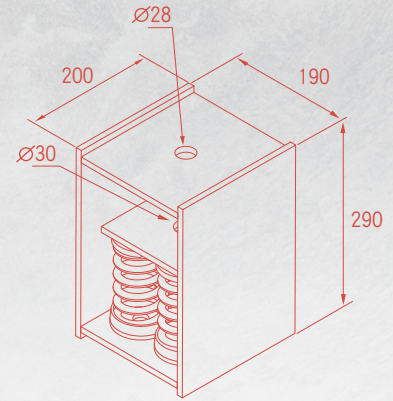

JH-4M / JH-4C

Specification

◎JH-MR(Deflection=25mm)


Type	Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
JH-100-MR	50~100	4	Yellow
JH-150-MR	100~150	6	White
JH-200-MR	150~200	8	Dark Green
JH-250-MR	200~250	10	Red
JH-300-MR	250~300	12	Blue
JH-400-MR	300~400	16	Brown
JH-500-MR	400~500	20	Red
JH-600-MR	500~600	24	Gray
JH-700-MR	600~700	28	Yellow
JH-850-MR	700~850	34	Khaki
JH-1000-MR	850~1000	40	Dark Green

◎JH-2M / JH-4M(Deflection=25mm)


Type	Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
JH-2-1200-M	1000~1200	48	Gray
JH-2-1400-M	1200~1400	56	Yellow
JH-2-1700-M	1400~1700	68	Khaki
JH-2-2000-M	1700~2000	80	Dark Green
JH-4-2400-M	2000~2400	96	Gray
JH-4-2800-M	2400~2800	112	Yellow
JH-4-3400-M	2800~3400	136	Khaki
JH-4-4000-M	3400~4000	160	Dark Green

◎JH-2C / JH-4C(Deflection=40mm)


Type	Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
JH-2-700-C	600~700	17.5	Gray
JH-2-900-C	700~900	22.5	Red
JH-2-1300-C	900~1300	32.5	Green
JH-2-1700-C	1300~1700	42.5	Dark Green
JH-2-2000-C	1700~2000	50	Yellow
JH-4-1400-C	1200~1400	35	Gray
JH-4-1800-C	1400~1800	45	Red
JH-4-2600-C	1800~2600	65	Green
JH-4-3400-C	2600~3400	85	Dark Green
JH-4-4000-C	3400~4000	100	Yellow

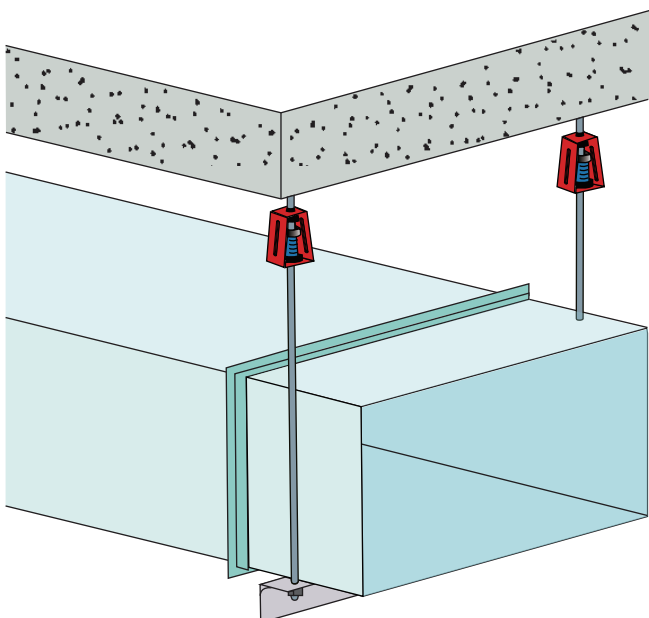


Dimensions(mm)

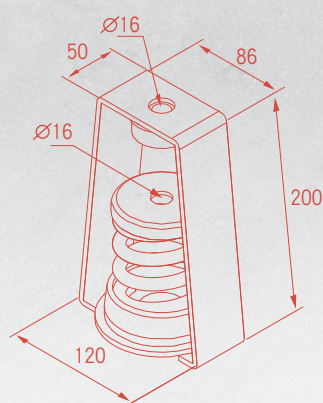


◎ JH-080-C

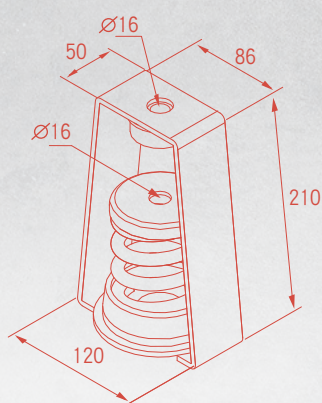

JH-150-C ~ JH-1000-C

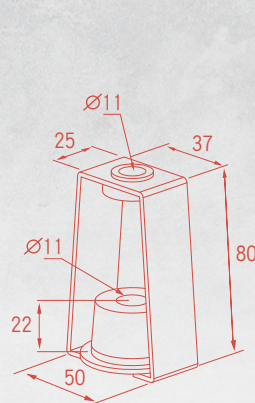

JH-025-R

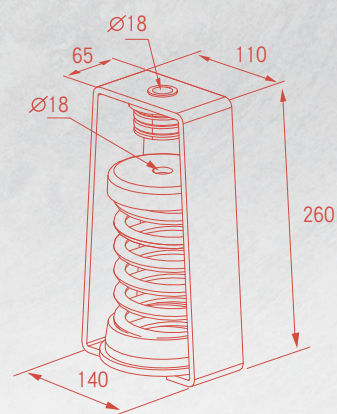

JH-D

Specification

◎JH-C(Deflection=40mm)

Type	Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
◎ JH-080-C	40~80	2.2	Purple
JH-150-C	80~150	3.8	Blue
JH-200-C	150~200	5.0	Brown
JH-350-C	200~350	8.8	Gray
JH-450-C	350~450	11.3	Red
JH-650-C	450~650	16.3	Green
JH-850-C	650~850	21.3	Dark Green
JH-1000-C	850~1000	25	Yellow

◎ Isolator Height = 200mm ◎

◎JH-R


Type	Capacity (kgs)
JH-025-R	8~25

◎JH-D(Deflection=50mm)

Type	Capacity (kgs)	Spring Rate (kg/mm)	Spring Color
JH-100-D	50~100	2	Yellow
JH-150-D	100~150	3	White
JH-250-D	150~250	5	Dark Green
JH-350-D	250~350	7	Red
JH-450-D	350~450	9	Brown
JH-600-D	450~600	12	Gray
JH-750-D	600~750	15	Khaki
JH-850-D	750~850	17	Green
JH-1000-D	850~1000	20	Blue

Applications

Hanging ceilings, HVAC ducting networks, Piping networks, Other suspension applications, Fans, Air handlers

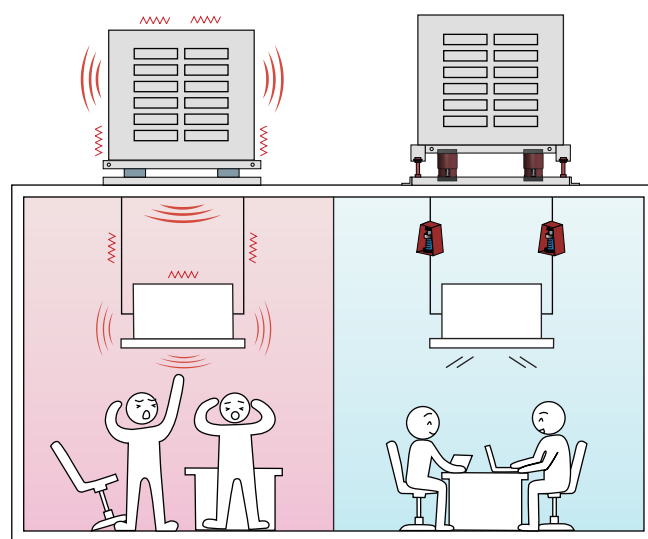

本公司保有依實際需要，變更本目錄內容之權利。