

JM Rubber Mounts

FEATURES


- Multiple-layer configurations
- Wide-range load with low natural frequency

BENEFITS

- Easy, low cost installation
- Excellent stability
- Excellent reliability due to rugged and simple construction
- Noise attenuation

APPLICATIONS

- Transformers
- Measuring instruments
- Gymnasiums
- Blowers, pumps and compressors
- Machinery

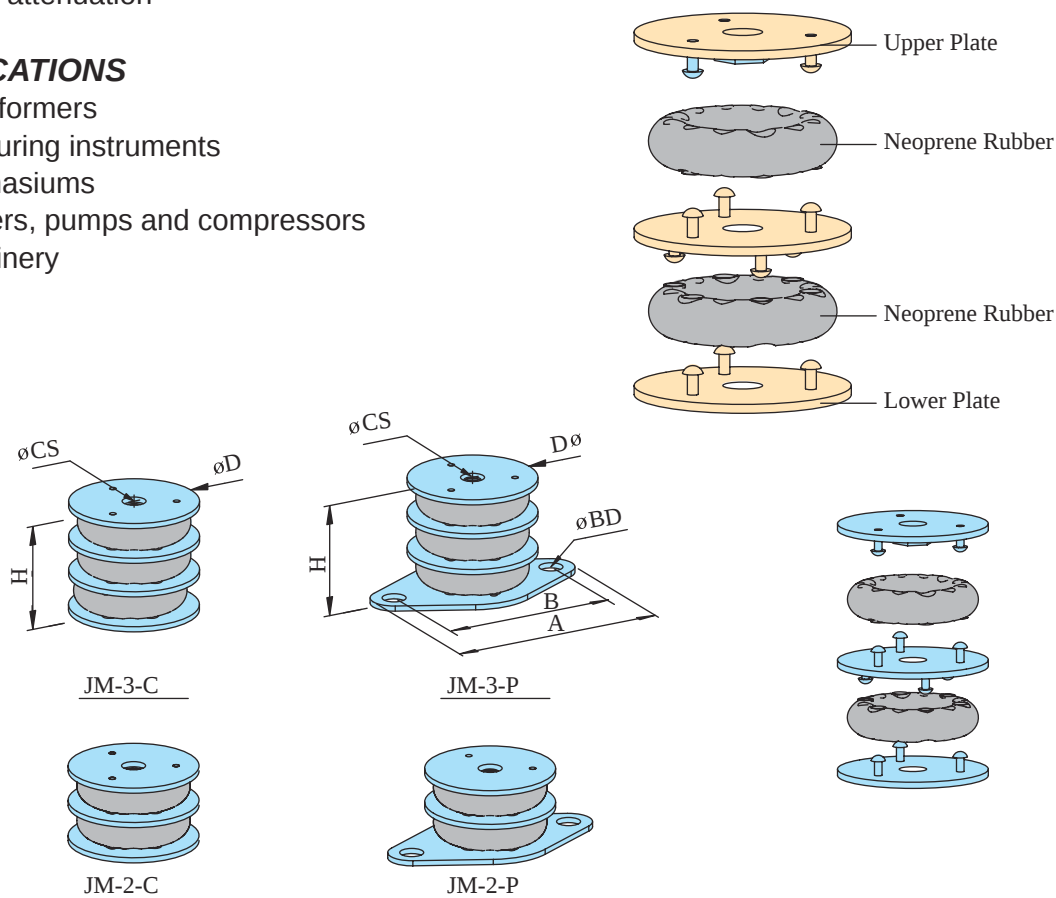

Part Number	Dimensions (mm)						Load Range (Kgs)		Static Deflection (mm)	Natural Frequency (Hz)	Max. Axial Static Load Rating Kgs
	Dø	H	A	B	øCS	øBD	Min	Max			
JM-0502-C.P.	50	30	91	73	M8	9	25	70	5	8	50
JM-0503-C.P.	50	44	91	73	M8	9	25	70	7	7.5	50
JM-0602-C.P.	60	35	105	83	M8	11	30	80	9	7	60
JM-0603-C.P.	60	51	105	83	M8	11	30	80	13	6	60
JM-0802-C.P.	80	47	140	110	M10	13	60	150	11	6.3	120
JM-0803-C.P.	80	68	140	110	M10	13	60	150	15	5.3	120
JM-1202-C.P.	120	67	210	165	M12	15	120	300	18	5	250
JM-1203-C.P.	120	98	210	165	M12	15	120	300	27	4.2	250
JM-1602-C.P.	160	86	280	220	M16	19	280	700	25	4.4	550
JM-1603-C.P.	160	126	280	220	M16	19	280	700	39	3.5	550