



HIGH PERFORMANCE


SE PNEUMATIC ISOLATOR



■ 6 MODEL x147(H)mm



SELF LEVELING
DEVICE



RUBBER ELEMENT

SAFETY DEVICE

MORE PRECISE

Easy to installation.


APPLICATIONS

- CONTOUR MEASURING SYSTEM
- MICROSCOPE
- SEMICONDUCTOR MEASURING SYSTEM
- SCANNING WHITE LIGHT INTERFEROMETER
- AOI INSPECTION SYSTEM



SELF LEVELING DEVICE (PATENT NO. M463163)

The releveling accuracy is better than $\pm 0.05\text{mm}$.



SAFETY DEVICE

To protect the rubber diaphragm when incorrect operation.





SPEED CONTROLLER

To adjust damping which can reduce vibration amplitudes at resonance.

UPGRADE

■ HEIGHT DETECTOR(OPTION)


Provide an alarm device which can easily detect the abnormal situation.




MORE SUPERIOR

1mm thickness rubber element provides high performance.

◎TRANSMISSIBILITY (VERTICAL)

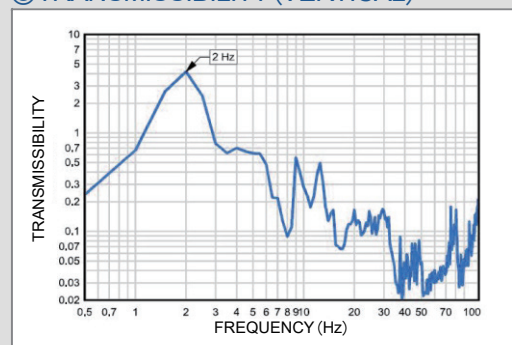

◎ACCELERATION

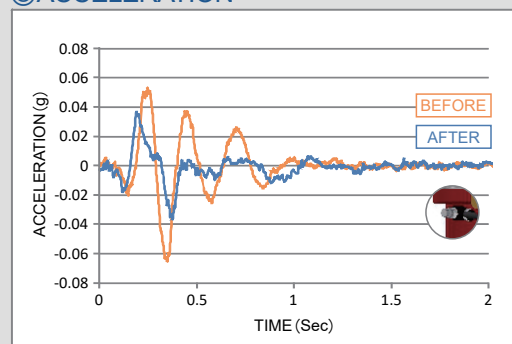

兆山辰 精密科技股份有限公司
JSC Scientific Controls Co., Ltd.

7F, No.8 Aly. 30, Ln. 358, Rui-Guang Rd., Nei-Hu Dist., 114, Taipei, Taiwan

T 02-8751-8115

F 02-8751-3115

E jsc@jsc.com.tw

http://www.jsc.com.tw

