


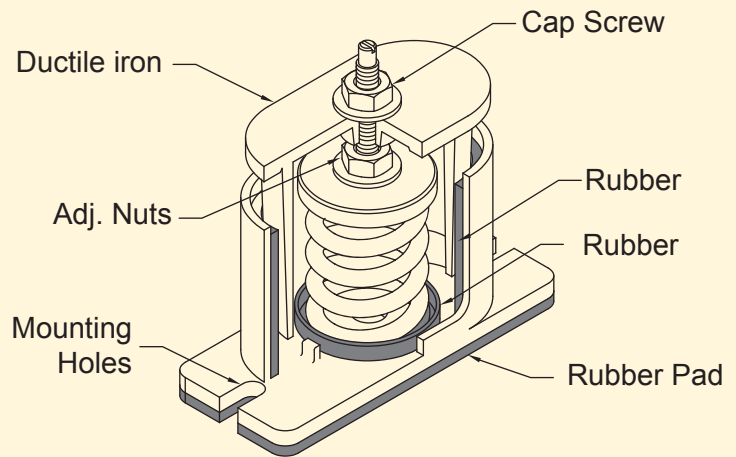

JB Type

FEATURES


- Ductile iron frame and housing.
- Resilient housing guides to prevent metal-to-metal contact.
- Hot dip galvanized finish.
- Non-skid Neoprene pad.

BENEFITS

- Quick and easy installation.
- Heavy-duty vibration isolation.
- Weather resistant finish.

APPLICATIONS

- Heavy engines.
- Pumps and compressors.
- Chillers and boilers.
- Generators.
- Fans.

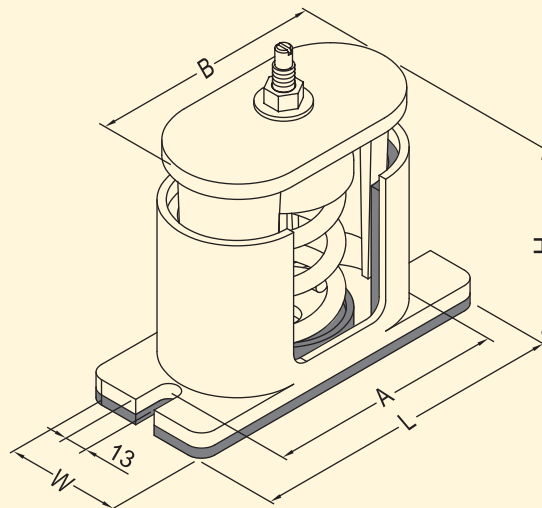

JB Type

Dimensions

Type	Dimensions(mm)					Mounting Bolt	Type	Dimensions(mm)					Mounting Bolt
	L	W	A	B	H			L	W	A	B	H	
JB-S	150	65	130	104	130	M10	JB-N	210	86	185	149	185	M12
JB-M	210	86	185	149	185	M12							

Note:JB-180-S&JB-250-S H:135mm



Specification

Type	Part Number	Rated Capacity Kg	Spring Rate Kg/mm	Rated Defl. mm	Color Code	Type	Part Number	Rated Capacity Kg	Spring Rate Kg/mm	Rated Defl. mm	Color Code
JB-S	JB-020-S	10 ~ 20	0.8	25	Yellow	JB-M	JB-400-M	300 ~ 400	16.0	25	Brown
	JB-030-S	20 ~ 30	1.2	25	Dark Green		JB-500-M	400 ~ 520	20.0	25	Red
	JB-050-S	30 ~ 50	2.0	25	Red		JB-600-M	520 ~ 620	24.0	25	Gray
	JB-070-S	50 ~ 70	2.8	25	Blue		JB-700-M	620 ~ 700	28.0	25	Yellow
	JB-090-S	70 ~ 90	3.6	25	Brown		JB-850-M	700 ~ 850	34.0	25	Khaki
	JB-120-S	90 ~ 120	4.8	25	Gray		JB-1000-M	850 ~ 1000	40.0	25	Drak Green
	JB-150-S	120 ~ 150	6.0	25	White	JB-N	JB-150-N	75 ~ 150	3.8	40	Blue
	JB-180-S	150 ~ 180	7.2	25	Orange		JB-200-N	150 ~ 200	5.0	40	Brown
	JB-250-S	180 ~ 250	10.0	25	Purple		JB-350-N	200 ~ 350	8.8	40	Gray
JB-M	JB-100-M	50 ~ 100	4.0	25	Yellow		JB-450-N	350 ~ 450	11.3	40	Red
	JB-150-M	100 ~ 150	6.0	25	White		JB-650-N	450 ~ 650	16.3	40	Green
	JB-200-M	150 ~ 200	8.0	25	Drak Green		JB-850-N	650 ~ 850	21.3	40	Drak Green
	JB-250-M	200 ~ 250	10.0	25	Red		JB-1000-N	850 ~ 1000	25.0	40	Yellow
	JB-300-M	250 ~ 300	12.0	25	Blue						